



Electrical Specifications




Center Frequency (F ₀)	45 MHz, Fundamental
Passband @ -3 dB	+/- 6 KHz min
Ripple	1 dB max
Insertion Loss	3 dB max
Stopband @ +/-12.5 KHz	15 dB min
Spurious	40dB min
Ultimate Attenuation @ F ₀ -910KHz	80 dB min
Terminating Impedance	670 Ohms//2.0pF (CC=10pF)

Operating Temperature

-20°C to +70°C

Mechanical Drawing & Pin Connections

Drawing No: MD2200%-1

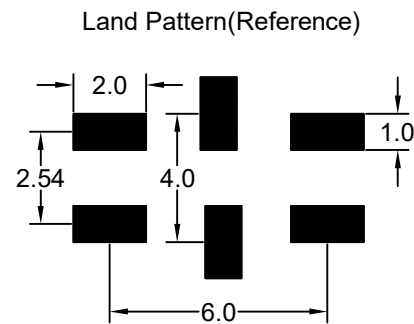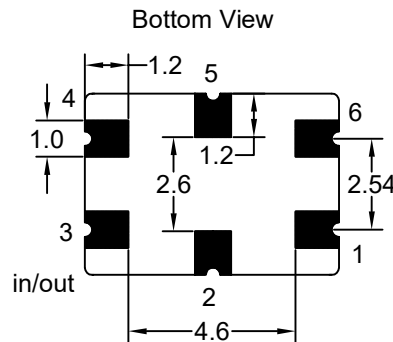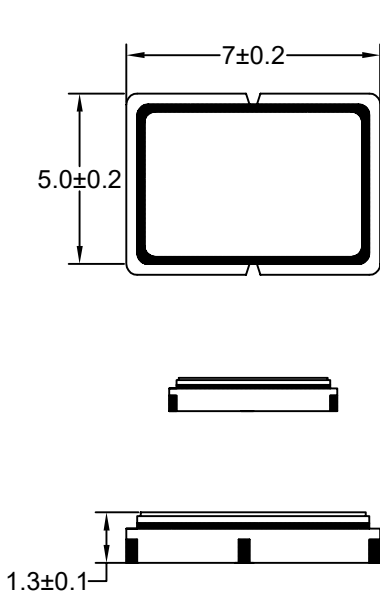

PIN#	Function
#1,#4	Metal lid for grounding
#2,#5	Coupling CAP.
#3,#6	M.C.F. in/out

Unit in mm
 1mm = 0.0394 inches