



Dynamic Engineers Inc.

2550 Gray Falls Dr., Suite#128, Houston, TX, 77077 USA
TEL: 1-281-870-8822 EMAIL: Sales@DynamicEng.com

89 → ++' !%(A < n
1.4MHz Crystal Filter

Electrical Specifications


Center Frequency (F ₀)	1.4 MHz
Passband Width @ -3 dB	+/- 500 Hz min
Ripple	2 dB max
Insertion Loss	5 dB max @ F ₀
Stopband @ 60dB	+/- 1500 Hz max
Impedance Z _{in} = Z _{out}	510 Ohm

Operating Temperature

-40°C to +70°C

Mechanical Drawing & Pin Connections

Drawing No: A8 & \$\$\$', !%

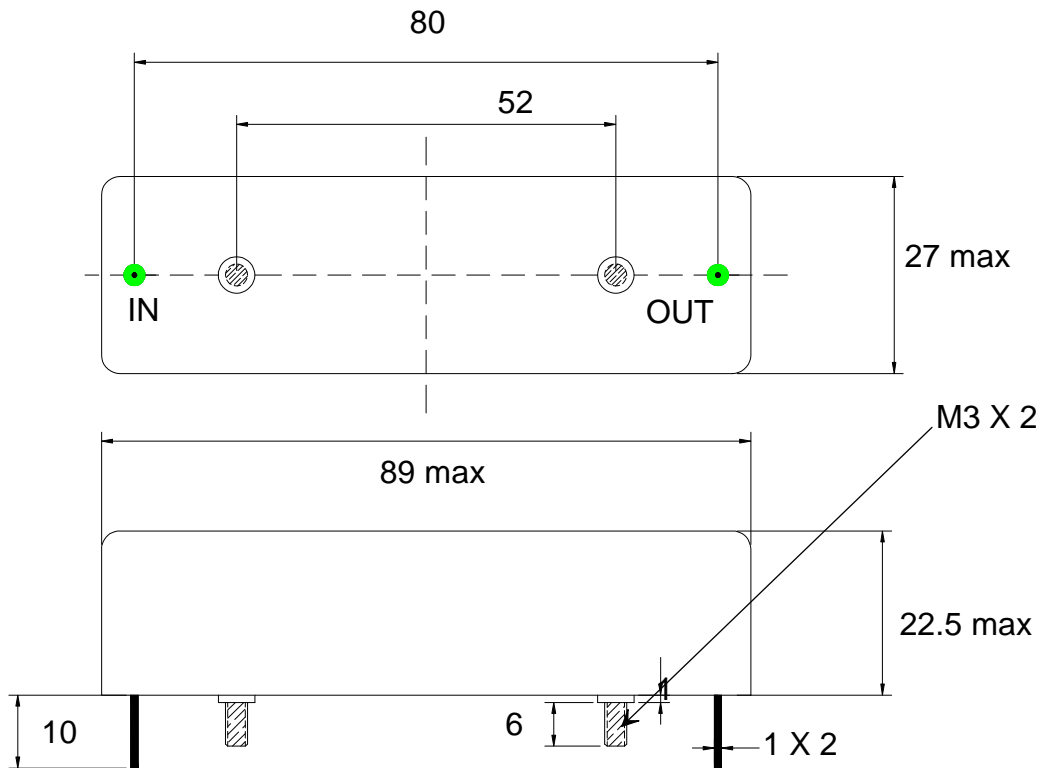

Unit in mm
1mm = 0.0394 inches