



Electrical Specifications



Center Frequency (F ₀)	10.000 MHz
Passband Width @ -3 dB	1.5 KHz min
Ripple	1.0 dB max
Insertion Loss	4.0 dB max
Stopband Width @ -60 dB	+/- 6 KHz max
Ultimate Attenuation	70 dB min
Spurs	60dB min
Input Level	0dBm
Impedance Z _{in} = Z _{out}	50 Ohms

Operating Temperature

-40°C to +85°C

Mechanical Drawing & Pin Connections

Drawing No : MD&&\$ \$ * !%

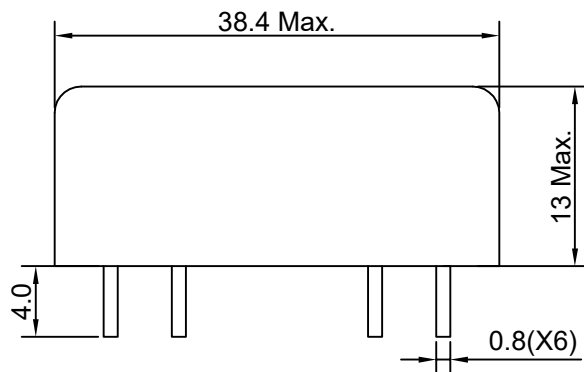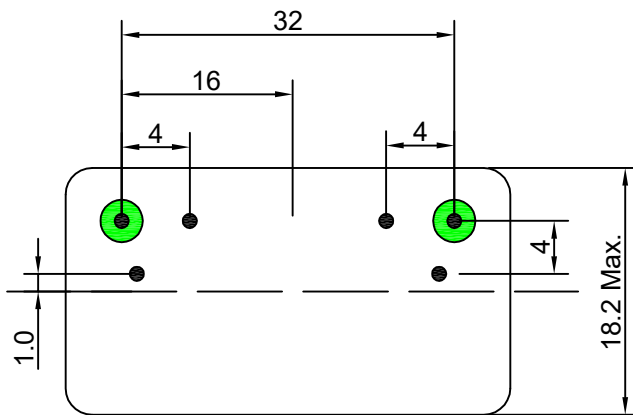

Unit in mm
1mm = 0.0394 inches