



Electrical Specifications



Center Frequency (Fo)	70 MHz
Passband Width @ -3 dB	+/- 100 KHz min
Ripple	1 dB max@Fo+/- 80 KHz
Insertion Loss	5 dB max
Stopband With @ - 40 dB	+/- 300 KHz max
Input Power	0dBm nominal, 10dBm max nondestructive
Ultimate Attenuation	50 dB
Impedance Zin = Zout	50 Ohms

Operating Temperature

-30°C to +70°C

Mechanical Drawing & Pin Connections

Drawing No: MD240031-1

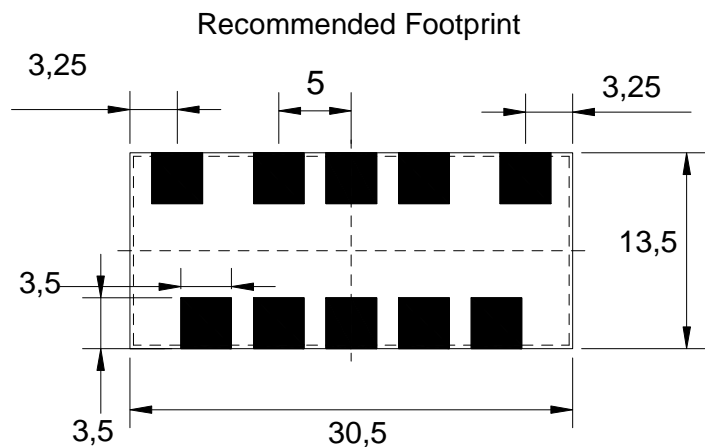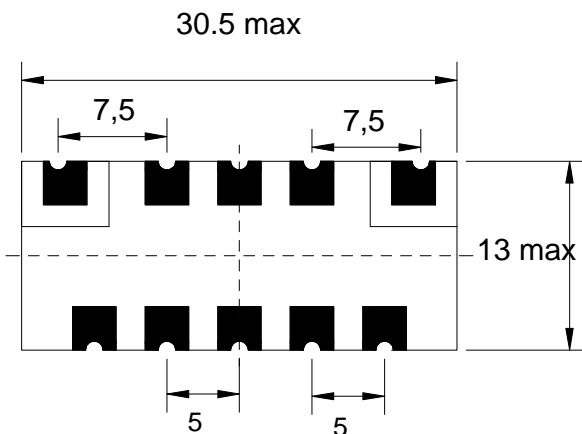

Tolerance : +/- 0.2 mm
 Bottom PCB thickness : 1.0 mm
 Unit in mm
 1mm = 0.0394 inches