




Electrical Specifications

Stop Band Frequency	2315.9 ~ 2349.1MHz
Stop Band Attenuation	>=45dB
Pass Band Frequency	DC ~ 2304.9MHz, 2360.1 ~ 6600MHz
Pass Band Insertion Loss	≤1.0dB @ DC ~ 2274.9MHz , 2390.1 ~6600MHz ≤2.5dB @ 2274.9 ~ 2304.9MHz , 2360.1 ~2390.1MHz
Pass Band VSWR	≤1.5:1
Impedance	50ohms
Connectors	SMA Female
Power	50W Max
Surface Finish	Painted Black
Temperature Range	-10°C--+50°C
Dimensions	209x41x22mm (Tolerance: ±0.5mm)

Mechanical Drawing & Pin Connections

Drawing No: MD210009-1

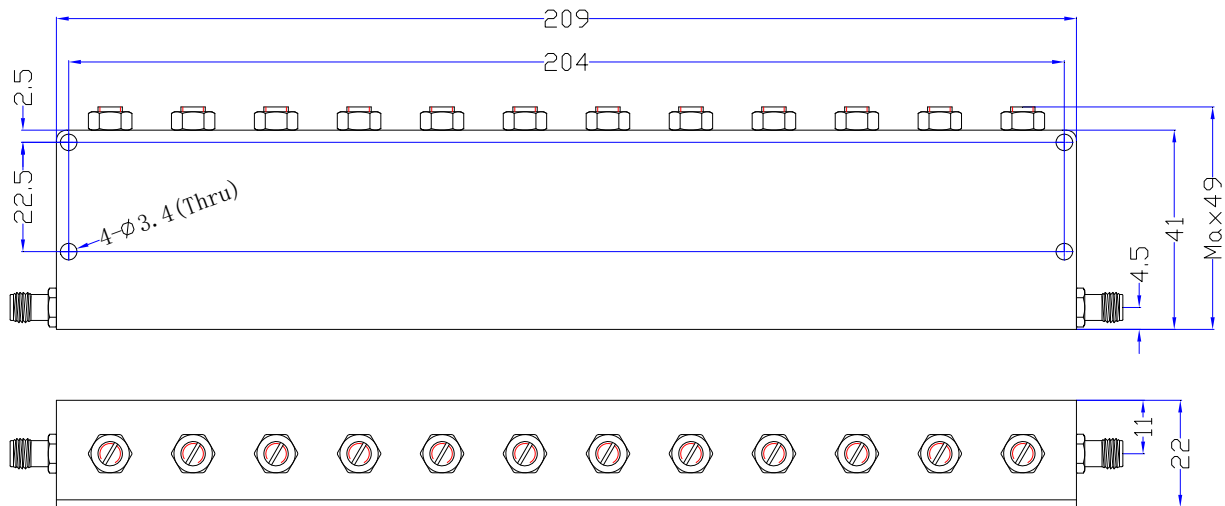

Unit in mm
1mm = 0.0394 inches