



### Features and Benefits

High stability: ± 10ppb over -10 to+60°C  
Low aging rate: ±1.5ppb/day, ±0.15ppm/year  
Output waveform: HCMOS

### Typical Applications


Stratum 3E clock systems  
Cellular Base Stations  
Instrumentation  
Microwave applications  
Radar reference

### Description

OCXO2525AW-61.44MHz-A-V offers high frequency stability, low long-term aging and low phase noise, all in a compact package to suit the different communication needs.

### Mechanical Drawing & Pin Connections

Drawing No: MD130010-1

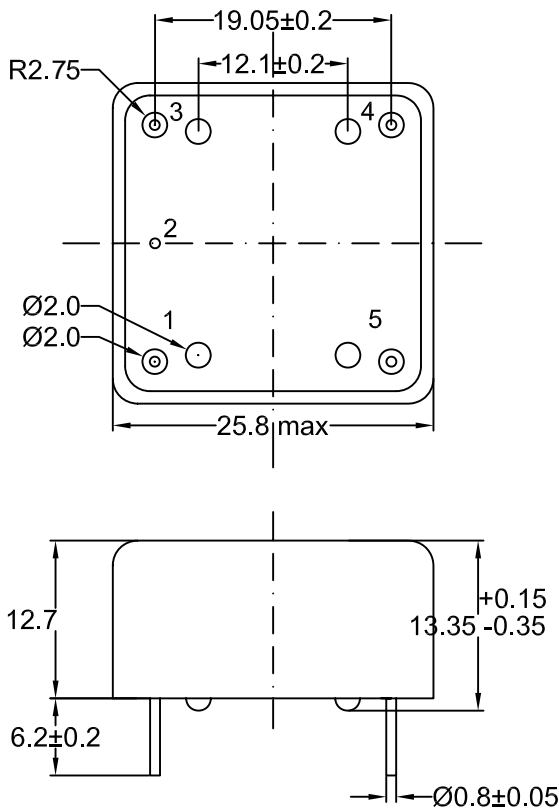

#### Pin connections:

Pin No.	Pin Function
1	Output
2	GND
3	Control Voltage
4	Reference Voltage
5	Supply Voltage

Unit in mm  
1mm = 0.0394 inches



# Dynamic Engineers Inc.

2550 Gray Falls Dr., Suite#128, Houston, TX, 77077 USA  
 TEL: 1-281-870-8822 EMAIL: Sales@DynamicEng.com

**OCXO2525AW-\* % ( MHz-A-V**  
 Pã @ cããã Á[ , Á @e^B [ ã^ÁJÓYU

## Specifications

Oscillator Specification	Sym	Condition	Value			Unit	Note
			Min.	Typ.	Max.		
Operational Frequency	F <sub>nom</sub>			61.44		MHz	
<b>RF Output</b>							
Signal Waveform			HCMOS				
Load	R <sub>L</sub>		10kohm//15pF				
H-Level Voltage	V <sub>H</sub>		2.4			V	
L- Level Voltage	V <sub>L</sub>				0.4	V	
Duty Cycle			45		55	%	
<b>Power Supply</b>							
Reference Voltage VREF Output			2.5		3.1	V	
Supply Voltage	V <sub>s</sub>		3.15	3.3	3.45	V	
Warm-up Time	T <sub>up</sub>	At +25°C to Δf/f=1e-7			180	s	ref to freq after 15 min of operation
Power Consumption		Steady state, +25°C			1200	mW	
		Warm-up			3500	mW	
<b>Frequency Adjustment Range</b>							
Electronic Frequency Control (EFC)		Compliance with 10 years of aging	±0.3			ppm	
EFC voltage	V <sub>c</sub>		0		3.1	V	
EFC Slope			positive				
<b>Frequency Stability</b>							
Versus Operating Temperature Range		ref. 25°C, air flow 0.5 m/s max.		±10		ppb	
Initial tolerance	(f-f <sub>0</sub> )/f <sub>0</sub>	+25°C, VC=0.5*Vref	±0.01	±0.1		ppm	
Versus supply voltage	V <sub>s</sub>	Ref Vcc typ		±0.2		ppb	
G-Sensitivity		Worst direction, 0 – 1kHz vibration BW (for 0 – 2kHz BW consult DEI)	±0.2	±1.0		ppb/G	
Retrace		24h work after 24h off			±10	ppb	
Aging Per Day		After 30 days of operation		±1.5		ppb	
Aging 1 <sup>st</sup> Year				±0.15		ppm	
Allan Variance		1s	0.5		15	e-12	
SSB Phase noise		10Hz		-100		dBc	
		100Hz		-130		dBc	
		1kHz		-153		dBc	
		10kHz		-160		dBc	
		100kHz		-162		dBc	
<b>Environmental, Mechanical Conditions</b>							
Operating temperature range	-10°C to +60°C						
Storage temperature range	-60°C to 85°C						
Airflow velocity	0.5 m/s maximum						
Power voltage	-0.5V to VCC+20%						
Control voltage	-0.5V to 6V						
Humidity	Hermetically sealed						
Mechanical shock	Per MIL-STD-202, 30G half sine pulse, 11ms (500G, 1ms — optionally)						
Vibration	Per MIL-STD-202, 10G swept sine 0 to 2000Hz						
Soldering conditions	Hand solder only – not reflow compatible. 260°C 10s (on pins)						
Washing conditions	Washing with water or alcohol based detergent allowed only with final enough drying stage						