



### Features and Benefits


Frequency range: 120MHz  
Supply voltage: 5V  
Steady current:240mA  
Output waveform: Sinewave  
Frequency stability vs. operating temperature:  $\pm 10$ PPB  
Aging:  $\pm 300$ PPB per year  
Operating temperature: -40°C to +85°C  
Size: 25.8x25.8x12.7

### Typical Applications

Test instrument reference  
Ref. for microwave communication system  
signal analyzer reference for internal synthesizers  
SATCOM systems

### Mechanical Drawing & Pin Connections

Drawing No: MD140078-1

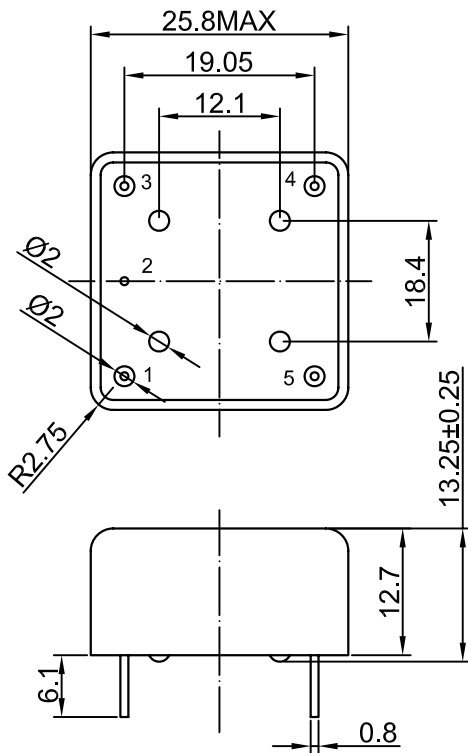

Pin connections:

Pin No.	Pin Function
1	Output
2	GND
3	Control Voltage
4	Reference Voltage
5	Supply Voltage

Unit in mm  
1mm = 0.0394 inches



**Specifications**

Oscillator Specification	Sym	Condition	Value			Unit	Note
			Min.	Typ.	Max.		
Frequency Range	f <sub>0</sub>			120		MHz	
<b>RF Output</b>							
Sine-wave	Level	L		+7		dBm	
	Load	R <sub>L</sub>	±5%		50	Ohm	
	Harmonics Level					-30	dBc
<b>Power Supply</b>							
Voltage	V <sub>cc</sub>		4.75	5	5.25	V	
Power Consumption		Warm-up			3500	mW	
		Steady-state, +25°C			1200		
Warm-up Time:	T <sub>up</sub>	@+25°C to Δf/ f=1e-7,			180	s	Ref. to freq. after 15 min. of operation
<b>Frequency Control</b>							
Control Voltage Range	V <sub>c</sub>		0		4.3	V	
Tuning Range			±0.3			ppm	Positive slope
Reference Voltage Output	V <sub>ref</sub>		4.0		4.3	V	
<b>Frequency Stability</b>							
Initial Tolerance		@+25°C, V <sub>C</sub> =0.5*V <sub>ref</sub>	±0.01	±0.1		ppm	
Versus Temperature		ref 25°C -40°C to +85°C			±10	ppb	air flow 0.5 m/s max.
Versus Supply Voltage		Ref. V <sub>cc</sub> typ.		±0.2		ppb	
Aging	Per day	After 30 days of operation			±3	ppb	
	First Year				±300	ppb	
G-sensitivity		worst direction, 0 – 1kHz vibration BW	±0.2	±1		ppb/g	
Phase Noise		1Hz		---		dBc/Hz	
		10Hz		-95			
		100Hz		-125			
		1KHz		-155			
		10KHz		-165			
		100KHz		-167			
<b>Environmental Conditions</b>							
Operating Temperature Range		-40°C to +85°C					
Storage Temperature Range		-60°C to +85 °C					
Humidity		Hermetically sealed					
Mechanical Shock		Per MIL-STD-202, 30G half sine pulse, 11ms					
Vibration		Per MIL-STD-202, 10G swept sine 0 to 2000Hz					
Soldering Conditions		Hand solder only – not reflow compatible. 260°C 10s (on pins)					
Washing Conditions		Washing with water or alcohol based detergent allowed only with final enough drying stage					