



Features and Benefits

- 5V supply
- 10 MHz frequency
- Up to ±3 ppb total stability over -40°C to +85°C

Description


A new series of high stability oven controlled oscillators with the latest integrated circuits topologies.

Typical Applications


- Telecommunication devices
- Mobile radio

Mechanical Drawing & Pin Connections

Drawing No: MD160042-1




VIEW FROM TOP

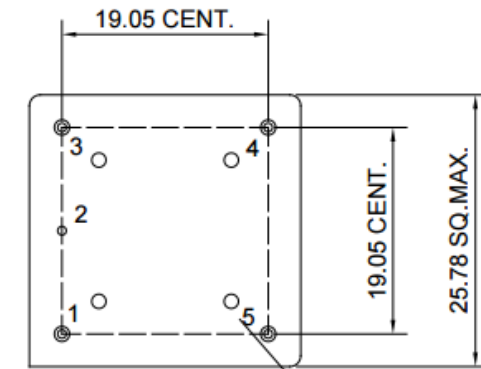

VIEW FROM BOTTOM

NUMBERS FOR REFERENCE ONLY
(NOT STAMPED ON UNIT)

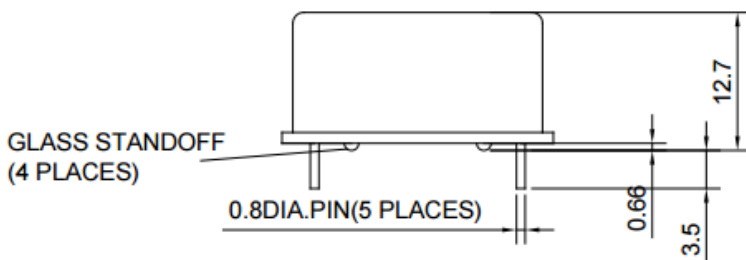

Pin	Signal
1	R.F. OUTPUT
2	0 VOLTS&CASE
3	VCO INPUT
4	REFERENCE VOLTAGE
5	+V Supply

Unit: mm
1mm=0.039inch



Specifications

1. Output (PIN = "R.F. OUTPUT")			
Parameter	Min.	Typ.	Max.
Frequency Range	10 MHz		
Initial Accuracy at +25°C ±1°C, after turn on power 15 ±1 minutes ≤ 90 days following date code VCO input at center voltage ±0.001V	-0.1 ppm		0.1 ppm
Waveform	Rectangular		
Level	LVTTTL		
"1" level	+2.6V	3.3V	
"0" level			+0.4V
Load	15 pF		
Duty Cycle @ +1.65V	45%	50%	55%
Rise / fall time 10% to 90%			6 ns
Spurious			-60 dBc

2. Frequency Stability			
Parameter	Min.	Typ.	Max.
Ambient referenced at 25°C		±3 ppb, ±5 ppb, ±10 ppb	
Operating temperature referenced at 25°C		-30°C to +70°C	
		-40°C to +85°C	
Aging			
per day at time of shipment	-0.5 ppb		+0.5 ppb
Daily after 30 days	-0.5 ppb		+0.5 ppb
Yearly	-50 ppb		+50 ppb
10 Years	-0.3 ppm		+0.3 ppm
Voltage ±5% change	-0.5 ppb		+0.5 ppb
Short term root Allan variance			0.05 ppb/s
Load ±5% change	-0.5 ppb		+0.5 ppb
Warm-up in 10 minutes @ +25 ±1°C referenced to 1 hour	-10 ppb		+10 ppb
Phase Noise (@25°C)			
@1Hz		-95 dBc/Hz	-90dBc/Hz
@10Hz		-125 dBc/Hz	-120dBc/Hz
@100Hz		-140 dBc/Hz	-135dBc/Hz
@1KHz		-148 dBc/Hz	-145dBc/Hz
@10KHz		-156 dBc/Hz	-155dBc/Hz
@100KHz		-158 dBc/Hz	-155dBc/Hz



3. Electrical Frequency Adjustment (PIN = "VCO INPUT")

Parameter	Min.	Typ.	Max.
Tuning Range referenced to frequency at nominal Center Voltage VCO @ Min. Voltage VCO @ Max. Voltage	+0.5 ppm		-0.5 ppm
Control Voltage	0		+5V
	0		+4V
Slope	Positive		
Center Voltage	+2.5V		
	+2.0V		
Linearity	-10%		+10%
Input impedance	100 kΩ		

4. Input Power (PIN = "+VDC")

Parameter	Min.	Typ.	Max.
Voltage	+4.75V	+5.0V	+5.25V
Current @ turn on			800 mA
Steady State @ +25°C			1.3 W

5. Reference Voltage (PIN = "Reference Voltage")

Parameter	Min.	Typ.	Max.
Voltage over -40°C to +85°C	+3.8V	+4.0V	+4.2V
Load over -40°C to +85°C	9 kΩ		

6. Environmental

Parameter	Reference standard	Condition
Operating temperature	-40°C to +85°C	
Storage temperature	-55°C to +105°C	
Humidity	MIL-STD-202, Method 103 Test Condition A	95% RH @ +40°C, non-condensing, 240 hours
Vibration (non-operating)	MIL-STD-202, Method 201	0.06" Total p-p, 10 to 55 Hz
Shock (non-operating)	MIL-STD-202, Method 213 Test Condition J	30g, 11ms, half-sine

Temperature Range vs. Stability Availability

Temperature range (°C)	Stability and Voltage			Control Voltage	Reference Voltage
	±3ppb	±5ppb	±10ppb		
-30 to +70	Available	Available	Available	2.5V	Not available
-40 to +85	Available	Available	Available	2.5V	Not available
-30 to +70	Available	Available	Available	2.0V	4.0V
-40 to +85	Available	Available	Available	2.0V	4.0V

Please contact Dynamic Engineers Inc. for further details.

Dynamic Engineers reserves the right to make changes to the company datasheet(s) along with other information contained inside; such as data tables and graphs without notification to potential customers who may have earlier revisions in their possession.