

Features and Benefits


Better than +/-1.0PPM from -40°C to +85°C
 49.152MHz CMOS output
 3.3V supply, 8.0mA maximum current

Typical Applications

Mobile SATCOM
 Mobile Radio
 Harsh Environments
 Femto cell

Mechanical Drawing & Pin Connections

Drawing No: MD150051-1

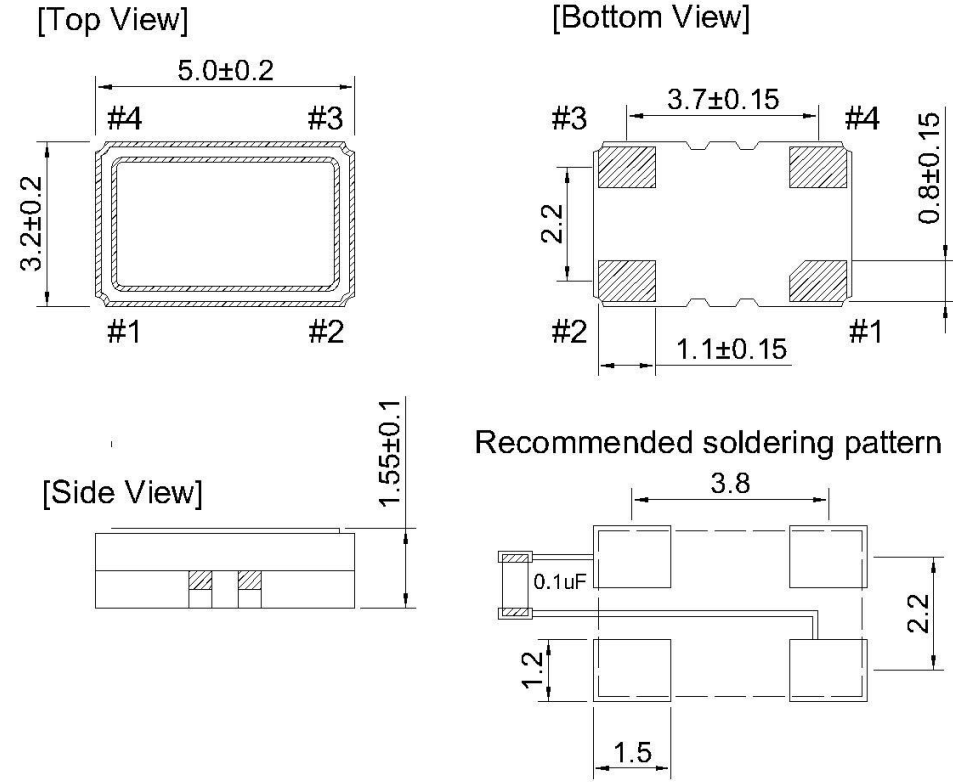

Pin	Function
#1	Control Voltage
#2	GND
#3	Output
#4	Supply Voltage

Unit : mm

Specifications

Oscillator Specification	Sym	Condition	Value			Unit	Note
			Min.	Typ.	Max.		
Nominal Frequency	F _{nom}			49.152000		MHz	
Output Wave Form			CMOS				
Output High Voltage			2.97			V	
Output Low Voltage					0.33	V	
Output Load					15	pF	
Start up Time					2	ms	
Duty Cycle		Measured at 50% V _{DD} trigger level	45	50	55	%	
Rise and Fall Times		CMOS logic output at 10% to 90%			6.0	Ns	
Power Supply							
Supply Voltage	V _{cc}		3.135	3.3	3.465	V	
Supply Current					8	mA	
Frequency Control*							
Control Voltage Range	V _c		0.5	1.5	2.5	V	
Tuning Range		Reference to VCON at 1.5V	+/-5			ppm	Positive slope
Linearity					10	%	
Frequency Stability							
VS. Temperature		From -40°C to +85°C Ref. to the frequency at +25°C			+/-1	ppm	
Tolerance at +25°C		Frequency at +25°C, 1hour after 2 times reflow			+/-2.0	ppm	
VS. Supply Voltage		+/-5% change at 25°C			+/-0.3	ppm	
VS. Load Change		+/-10% change at 25°C			+/-0.2	ppm	
Year Aging		First year			+/-1.0	ppm	
Phase Noise (typ.)		@10 Hz			-80	dBc/Hz	
		@100 Hz			-107		
		@1 KHz			-128		
		@10 KHz			-148		
		@100 KHz			-155		
Environmental Conditions							
Parameter	Reference Std.		Test Condition				
Operating Temperature range	-40°C to +85°C						
Storage Temperature range	-55°C to +125°C						
Vibration Test	MIL-STD-883 2007 Condition A JESD22-B103 Condition 1		10 – 2000Hz, 1.52mm, 20g, each axis 4hrs				
Thermal Shock	MIL-STD-883 1010 Condition B JESD22-A104 Condition B		-55°C, 125°C; soak time is 10mins, with total 200 cycles.				
Mechanical Shock	MIL-STD-883 2002 Condition B JESD22-B104 Condition B		1500G, half-sine, 0.5ms, each axis for 3 times				