

Features and Benefits

10 MHz VCTCXO
 3.3V
 Clipped Sine
 +/- 0.5 ppm from -40°C to +85°C
 5 x 3.2mm SMD




Typical Applications

Mobile Radio
 GPS
 Beidou Navigation Systems

Description

The TCXO5300THP family offers low compensation techniques combined with aggressive conditioning processes resulting in outstanding long term frequency stability, tightly distributed performance parameters, and superior long term reliability.

Mechanical Drawing & Pin Connections

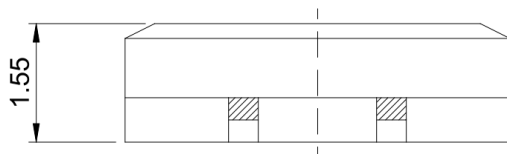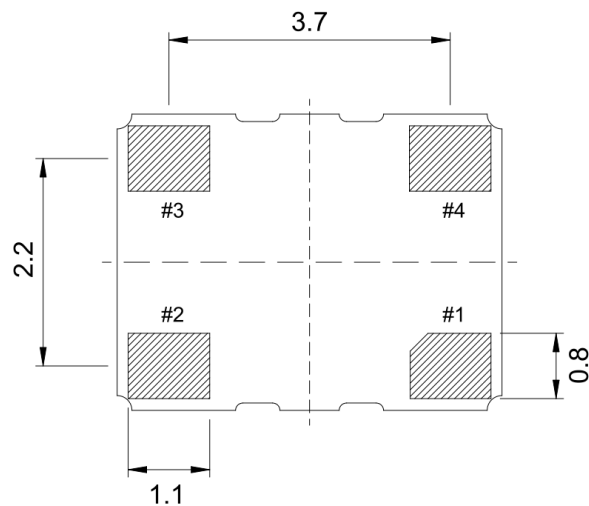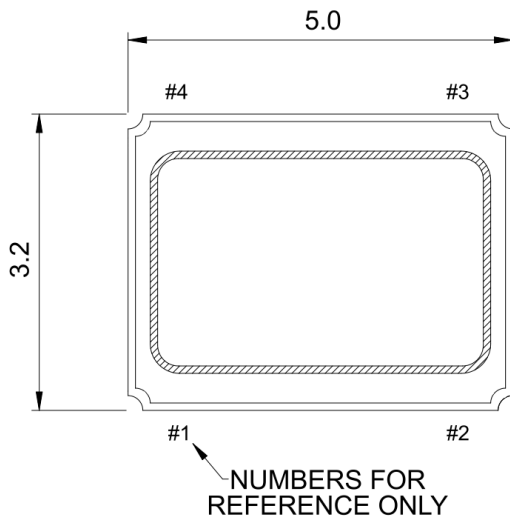

PIN NO.	CONNECTIONS
1	Control Voltage
2	Ground
3	Output
4	Supply Voltage

Specification

Oscillator Specification	Sym	Condition	Value			Unit	Note
			Min.	Typ.	Max.		
Operational Frequency Range	F_{nom}		10.000000			MHz	
Clipped Sine	Logic Level 1		0.8			Vp-p	
	Logic Level 0				2.0	Vp-p	
	Start Time				2.0	ms	
Power Supply							
Voltage	V_{cc}		3.135	3.3	3.465	V	
Current Consumption					3.5	mA	
Frequency Control*							
Control voltage range	V_c		0.5	1.5	2.5	V	Tuning Slope Positive
Tuning range			± 5.0			ppm	
Input Impedance			100			Ω	
Frequency Stability							
Versus temperature		-40°C to 85°C, ref 25°C	-0.5		+0.5	ppm	
Tolerance at 25°C		1 hour after 2 times reflow	-2.0		+2.0	ppm	
Versus $\pm 5\%$ change in supply voltage			-0.2		+0.2	ppm	varied $\pm 5\%$ at 25°C
Versus $\pm 10\%$ change in load			-0.2		+0.2	ppm	
First Year Aging			-1.0		+1.0	ppm	first years at 25°C
SSB Phase noise (typ.) @10 MHz Clipped Sine output and $V_{cc} = 3.3V$		1 Hz				dBc/Hz	
		10 Hz			-90		
		100 Hz			-115		
		1000 Hz			-135		
		10 KHz			-148		
		100 KHz			-152		
Environmental Conditions							
Operating temperature range		-40°C to +85°C					
Storage temperature range		-55°C to +125°C					
Mechanical Shock		MIL-STD-883 2002, 1500G, half-sine, 0.5ms, each axis for 3 times.					
Vibration Test		MIL-STD-883 2007, 10~2000Hz, 1.52mm, 20g, each axis for 4 hrs					
Thermal Shock		MIL-STD-883 1010, -55°C, 125°C; soak time is 10 mins, w/ total 200 cycles					