

## Features

Frequency : 16.368000 MHz  
 3.2 mm x 2.5 mm x 0.90 mm ceramic SMD  
 +/- 0.5 ppm from -30C to 70C  
 clipped sine wave  
 3.3V supply range

## Picture of Part




## Typical Applications

Specially Designed for GPS Receiver Module

## Description

The TCXO5300TX family offers low noise compensation techniques combined with aggressive conditioning processes resulting in superior long term reliability based on many years in production.

## Mechanical Drawing and PIN Connections

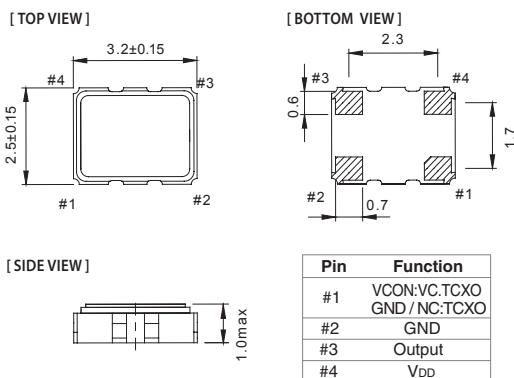

## Specification

TCXO Specification		Sym.	Condition	Value			Unit	Note
				Min.	Typ.	Max.		
<b>Operational Frequency Range</b>		$f_0$			16.368000		MHz	
Clipped Sine-wave	Level	L		0.8			pk-pk	
	Load Resistance	RL			10		Kohm	
	Load Capacitance	CL			10		pF	
<b>Power supply</b>								
Voltage		Vcc			3.300		V	
Current consumption		Icc				2.0	mA	clipped sine wave
<b>Frequency control*</b>								
N/A Clock TCXO								
<b>Frequency stability</b>								
vs. temperature			-30 °C to +70 °C, ref 25 °C	-0.500		+0.500	ppm	
vs. 5% change in supply voltage			ref Vcc typ.	-0.200		+0.200	ppm	
Tolerance at 25C				-2.000		+2.000	ppm	Frequency 1 hr after reflow
SSB Phase noise @16.368 MHz clipped sine			100 Hz			-115	dBc/Hz	
			1000 Hz			-135		
			10 kHz			-148		
Total Aging	Per Year		Projected after 30 days operation	-1.000		+1.000	ppm	
<b>Environmental, mechanical conditions.</b>								
Operating temperature range			<b>-30 °C to +70 °C</b>					
Storage temperature range			<b>-55 °C to +125 °C</b>					
Mechanical shock			1500G ; half sine ; 0.5 ms ; each AXIS for three times					
Vibration			10 to 2000 Hz ; 1.52mm ; 20G ; each axis for 4 hrs					

## Ordering information

TCXO5300TX-16.368MHz