

Features

Stability: ± 2.5 ppm over -40°C to $+85^{\circ}\text{C}$
 Low Phase Noise : -140dBc/Hz typ. at 1KHz
 Rugged SMD Package


Typical Applications

Land Mobile Radio
 Microwave Communications

Description




Low Phase Noise 22 MHz Clock TCXO with thermistor compensation.

Mechanical Drawing and PIN Connections

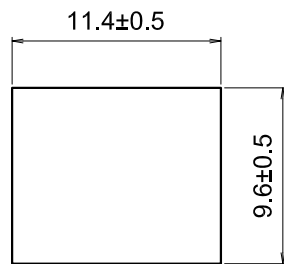

PIN CONNECTION

- #1 N.C or V.C
- #2 GND
- #3 OUTPUT
- #4 Vcc

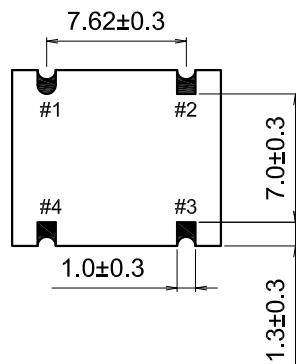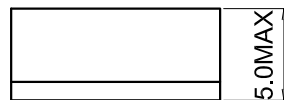

Recommended Soldering Pattern

