



Electrical Specifications


Center Frequency (Fo)	1767.5 MHz
Passband Width	25MHz (1755 ~ 1780MHz)
Ripple	0.1 dB max
Insertion Loss	0.5 dB max
Pass Band VSWR	1.22:1 max
Stopband	≥50dB @ DC ~ 1575MHz
	≥50dB @ 1960 ~ 4000MHz
Connectors	SMA-Female
Surface Finish	Painted Black
Power Handling	5W max
Impedance	50 Ohms

Operating Temperature

-30°C to +70°C

Mechanical Drawing & Pin Connections

Drawing No : MD210002-1

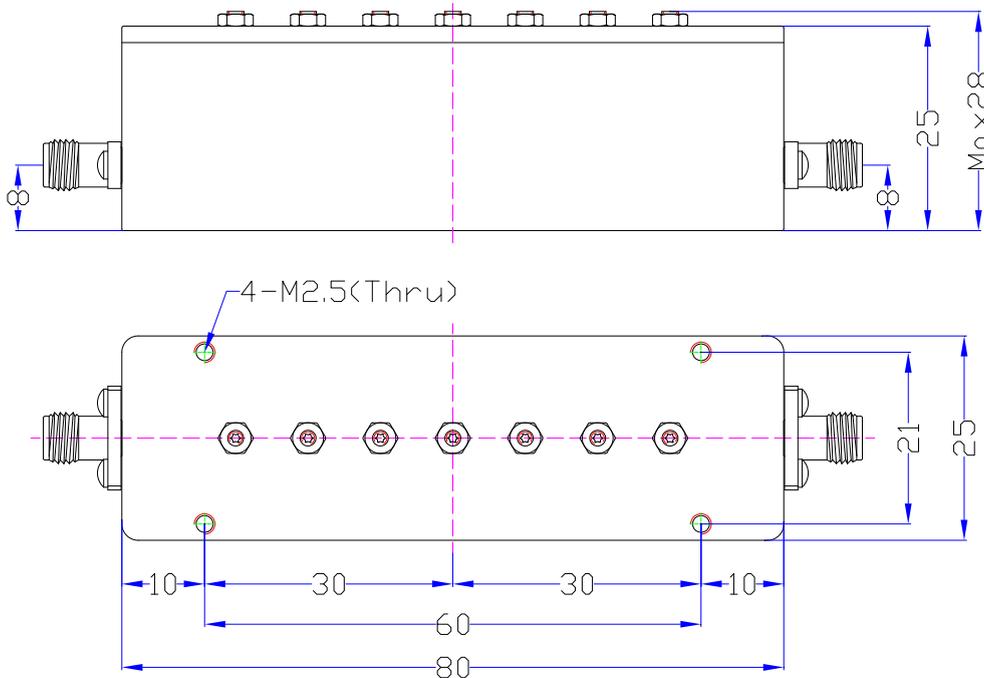

Unit in mm
1mm = 0.0394 inches