



## Features and Benefits

Center frequency: 717MHz

I.L: 4.5dB Max.

Operating temperature: -40°C to +85°C

Size: 3x3x1.4mm

Package type: Surface Mount



## Typical Applications

IOT

Cellular

Telecom

4G/LTE

Wireless Communication


WLAN

Base Station

Radar

## Mechanical Drawing & Pin Connections

Drawing No: MD240080-1

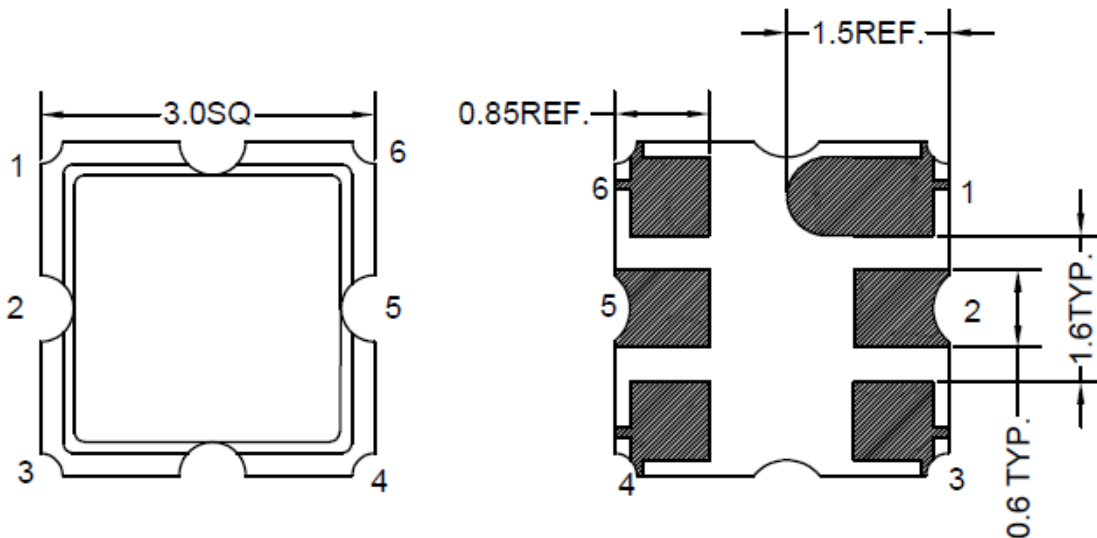

PIN	Function
#2	INPUT
#5	OUTPUT
Others	GND

Unit in mm

1mm = 0.0394 inches

Not Specified Tolerance:  $\pm 0.2\text{mm}$



## Specifications

Parameter		Min.	Typical	Max.	Units
Center Frequency	Fc		717		MHz
Insertion Loss (698~736 MHz)	IL		3.3	4.5	dB
Return Loss (698~736 MHz)		10	12		dB
Attenuation (Reference level from 0 dB)					
10~640	MHz	30	45		dB
820~1350	MHz	30	45		dB
Temperature Coefficient of Frequency			-75		ppm/k
Input Power Level			10		dBm
DC Voltage			3		V
Operating Temperature Range		-40		+85	°C
Storage Temperature Range		-40		+85	°C
Moisture Sensitivity Level		Level 1(MSL1)			