



Features and Benefits


Typical 7.0 x 5.0 x 1.9 mm ceramic SMD package
High Precision and High Temperature for -40°C ~ +95°C, ± 0.1 ppm,
-40°C ~ +105°C, ± 0.2 ppm.
CMOS and Clipped Sine wave (without DC-cut capacitor) output
optional.

Typical Applications

Femtocell, Base Stations
WLAN / WiMAX / WiFi, Wireless Communications

Mechanical Drawing & Pin Connections

Drawing No: MD150015-1

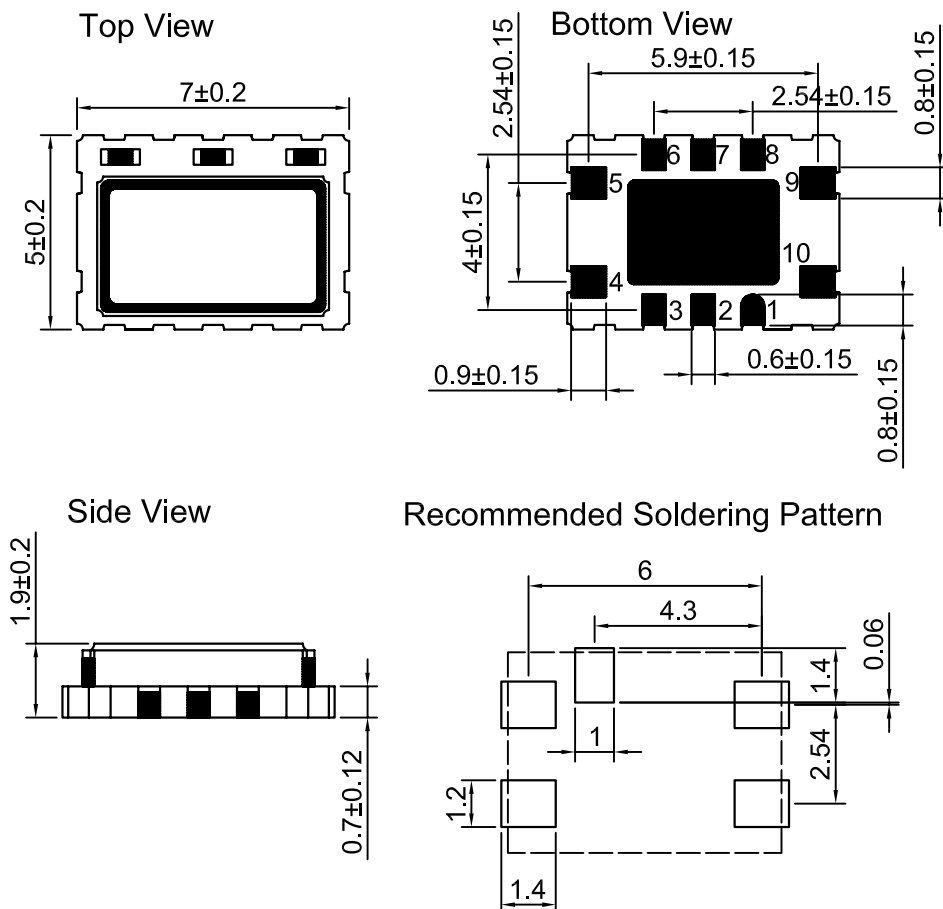

Pin Function

#1	NC
#2	NC
#3	NC
#4	GND
#5	Output
#6	NC
#7	NC
#8	Tri-State Control
#9	VDD
#10	VCON

Unit in mm
1mm = 0.0394 inches



Dynamic Engineers Inc.

2550 Gray Falls Dr., Suite#128, Houston, TX, 77077 USA
TEL: 1-281-870-8822 EMAIL: Sales@DynamicEng.com

TCXO7502BM_series

High Precision TCXO

Specifications

Specification	Conditon	3.3V		2.5V		Unit
		Min.	Max.	Min.	Max.	
Supply Voltage Variation(VDD)		V _{DD} -5%	V _{DD} +5%	V _{DD} -5%	V _{DD} +5%	V
Frequency Range		10	52	10	52	MHz
Standard Frequency		10,19.2,20				MHz
Frequency Tolerance			±1.5		±1.5	ppm
Frequency Stability						
Vs Supply Voltage	±5% Change		±0.1		±0.05	ppm
Vs Load	±10% Change		±0.05		±0.05	ppm
Vs Aging	1 st year		±1.0		±1.0	ppm
Supply Current	CMOS	-	7.5	-	7	mA
	Clipped Sinewave	-	5.0	-	4.5	
Output Level(CMOS)	Output High	90%VDD	-	90%VDD	-	V
	Output Low	-	10%VDD	-	10%VDD	
	Duty	45	55	45	55	%
Output Level(Clipped Sinewave)		0.8		0.8		Vp-p
Load(CMOS)		15		15		pF
Load(Clipped Sinewave)		10kohm//10pf		10kohm//10pf		
Control Voltage Range(VCTCXO)		0.5	2.5	0.5	2.5	V
Pulling Range(VCTCXO)		±5		±5		ppm
Vc Input Impedance(VCTCXO)		100		100		kohm
Phase Noise@20MHz						dBc/Hz
100Hz		-130		-130		
1KHz		-148		-148		
10KHz		-156		-156		
Start Time		-	2	-	2	mSec
Storage Temperature		-55	-125	-55	-125	°C

Frequency Stability vs. Temperature

	$\pm 0.05\text{PPM}$	$\pm 0.1\text{PPM}$	$\pm 0.2\text{PPM}$	$\pm 0.28\text{PPM}$	$\pm 0.5\text{PPM}$	$\pm 2\text{PPM}$
-40°C to +85°C	Conditional	Available	Available	Available	Available	Available
-40°C to +95°C	Conditional	Conditional	Available	Available	Available	Available
-40°C to +105°C	Not Available	Conditional	Available	Available	Available	Available

Note: not all combination of options are available. Other specifications may be available upon request.