




Dynamic Engineers Inc.

Website: www.DynamicEngineers.com
Email: Inquiry@DynamicEngineers.com

J7 C %& %& E !& % \$ A < n ! & * \$ A < n ! 5
GF Ĥ Ĥ Ĥ Ĥ MHz SMD VCO_Voltage Controlled
Oscillator

Features and Benefits

Frequency Range: 2160-2360MHz
Supply Voltage: 5V
Current: 26mA Typ.
Output power: +5dBm Typ.
Tuning Voltage: 0.5-4.5V
Phase noise: -106dBc/Hz@10KHz
Operating temperature: -40°C--+85°C
Size: 12.7x12.7x3.9mm
Package type: SMD





Typical Applications

SATCOM
Receiver
Test Equipment
Radar
Point-to-Point
Radio
MMDS
WiMax

Mechanical Drawing & Pin Connections

Drawing No: MD140084-2

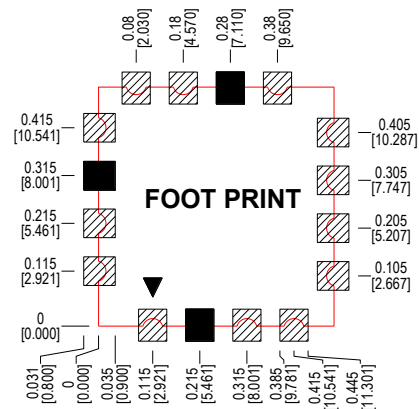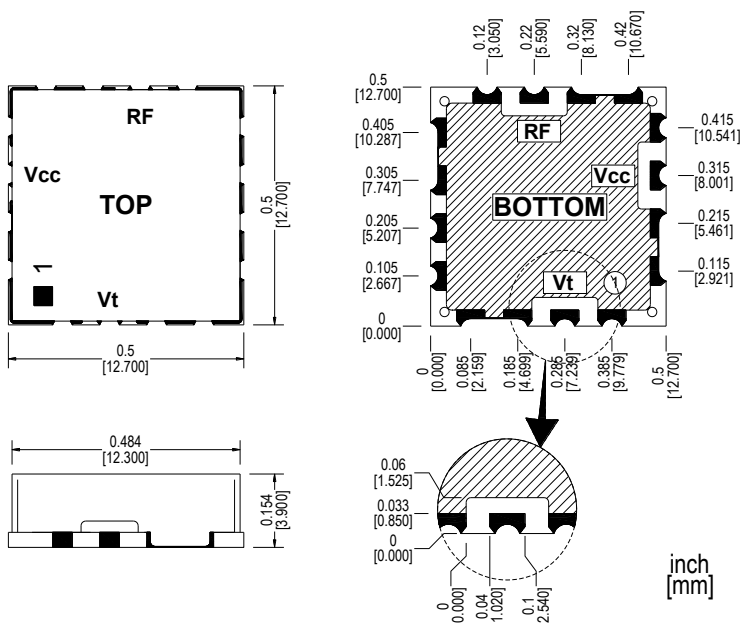

PIN CONNECTIONS	
2	Vt
10	RF Out
14	Vcc
Others	GND



Specifications

Parameter		Units	Min.	Typical	Max.
Operating Frequency Range		MHz	2160		2360
Power Supply (Vcc)	Voltage	Vdc		+5	
	Current	mA		26	
Output Power		dBm		+5	
Output Impedance		Ω		50	
Phase Noise @10kHz offset		dBc / Hz		-106	
Phase Noise @100kHz offset		dBc / Hz		-126	
Tuning Voltage (Vt)		V	0.5		4.5
Tuning Voltage Sensitivity (Kv)		MHz / V		60	
2 nd Harmonic Suppression		dBc		-16	
Pushing Figure		MHz / V		0.7	
Pulling Figure		MHz		2	
Input Capacitance		pF		47	
Operating Temperature Range		°C	-40		+85