



Dynamic Engineers Inc.


Website: www.DynamicEngineers.com
Email: Inquiry@DynamicEngineers.com

J7 C%&/%6 E!' +\$A<n!' , \$A<n!5

H €H €MHz SMD VCO_Voltage Controlled
Oscillator

Features and Benefits

Frequency Range: 370-380MHz
Supply Voltage: 5V
Current: 15mA Typ.
Output power: 0dBm Typ.
Tuning Voltage: 0.5-4.5V
Phase noise: -119dBc/Hz@10KHz
Operating temperature: -40°C--+85°C
Size: 12.7x12.7x3.9mm
Package type: SMD





Typical Applications

SATCOM
Receiver
Test Equipment
Radar
Point-to-Point
Radio
MMDS
WiMax

Mechanical Drawing & Pin Connections

Drawing No: MD140084-2

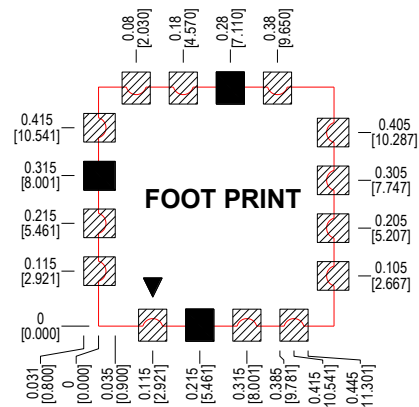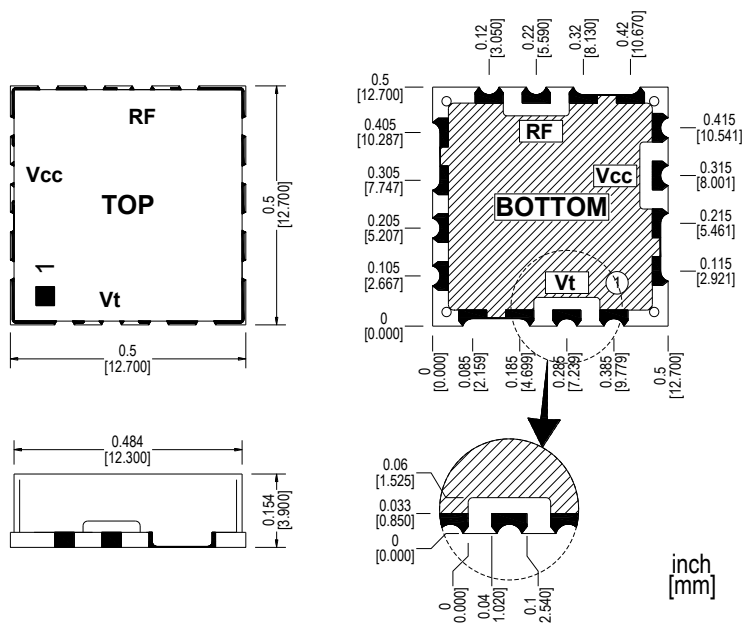

PIN CONNECTIONS	
2	Vt
10	RF Out
14	Vcc
Others	GND



Specifications

Parameter		Units	Min.	Typical	Max.
Operating Frequency Range		MHz	370		380
Power Supply (Vcc)	Voltage	Vdc		+5	
	Current	mA		15	
Output Power		dBm		0	
Output Impedance		Ω		50	
Phase Noise @10kHz offset		dBc / Hz		-119	
Phase Noise @100kHz offset		dBc / Hz		-139	
Tuning Voltage (Vt)		V	0.5		4.5
Tuning Voltage Sensitivity (Kv)		MHz / V		6	
2 nd Harmonic Suppression		dBc		-15	
Pushing Figure		MHz / V		0.5	
Pulling Figure		MHz		1	
Input Capacitance		pF		100	
Operating Temperature Range		°C	-40		+85