



Dynamic Engineers Inc.

2550 Gray Falls Dr., Suite#128, Houston, TX, 77077
TEL: 1-281-870-8822 EMAIL: Sales@DynamicEng.com

VCO1212W-5500-5900-A

Service Mount Voltage Controlled Oscillator

Features and Benefits

5500-5900 MHz approx. frequency range
Low phase noise up to -78 dBc/Hz @ 10 KHz offset
Low pushing / low pulling
Linear tuning characteristics
Aqueous washable

Typical Applications


SATCOM
Point to point communication
Radio and broadcast

Description

Ultra-low Noise Surface Mount VCO

Mechanical Drawing & Pin Connections

Drawing No: MD140084-1

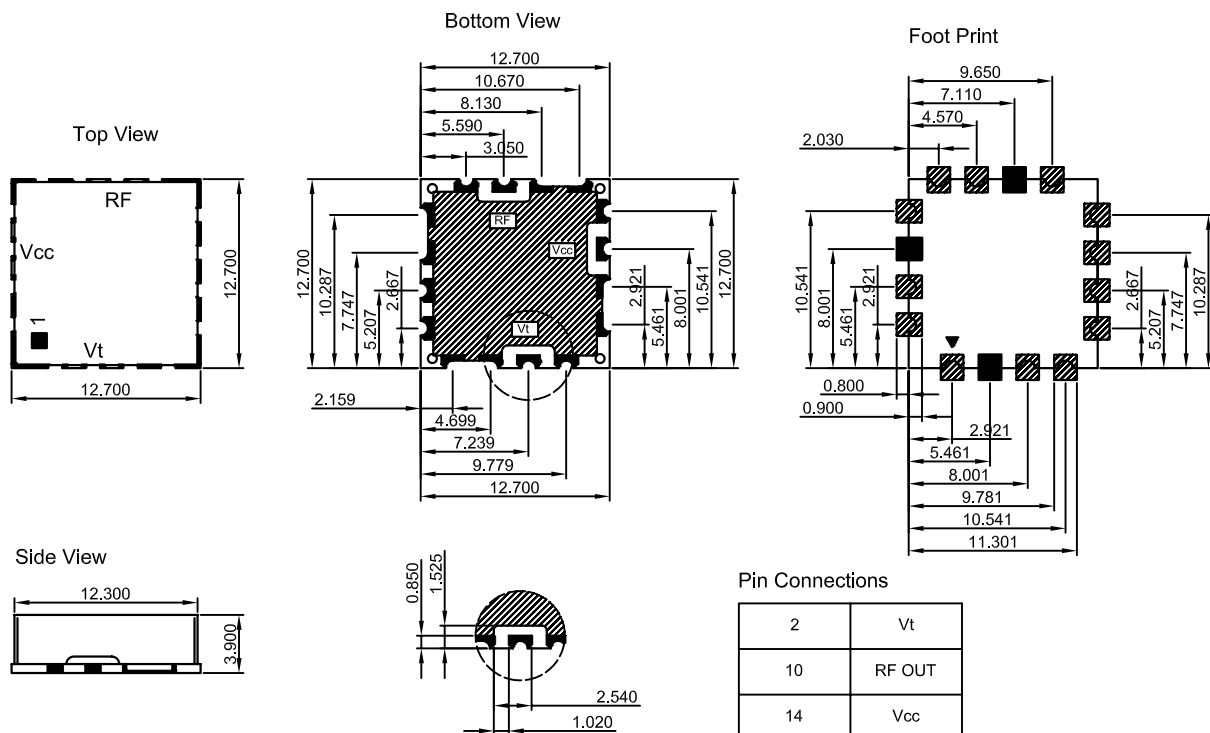

Unit in mm
1mm = 0.0394 inches



Specifications

Parameter		Units	Min.	Typical	Max.
Operating Frequency Range		MHz	5500		5900
Power Supply (Vcc)	Voltage	V		5	
	Current	mA		28	30
Output Power		dBm	-3.0	0.0	
Output Impedance		Ω		50	
Phase Noise @10kHz offset		dBc / Hz		-83	-78
Tuning Voltage (Vt)		V	0.5		4.5
Tuning Voltage Sensitivity (Kv)		MHz / V		138 – 145	
2nd Harmonic Suppression		dBc			-10
Pushing Figure		MHz / V		4	
Pulling Figure (10 dB Return Loss, all phases)		MHz		4	
Input Capacitance		pF		22	
Operating Temperature Range		$^{\circ}\text{C}$	-20		+85