



Features and Benefits

Frequency range: 10MHz
Supply voltage: 5.0V
Steady current: 2.5W Max
Output waveform: HCMOS
Frequency stability vs. operating temperature: ± 0.05 ppb
Aging: ± 40 ppb per year
Phase noise@100KHz: -160dBc/Hz
Operating temperature: -10°C to +70°C
Size: 36x27x18mm

Typical Applications

SATCOM System
Cellular Base Stations
Radar Applications


Description

DOCXO3627BM-10MHz-113 is designed for applications where exceptional frequency stability and timing is required. It has both excellent temperature performance and short-term stability. These characteristics make it an excellent choice for timing applications requiring holdover of < 10 us for 24 hours.

Mechanical Drawing & Pin Connections

Drawing No: MD150083-5

Bottom View

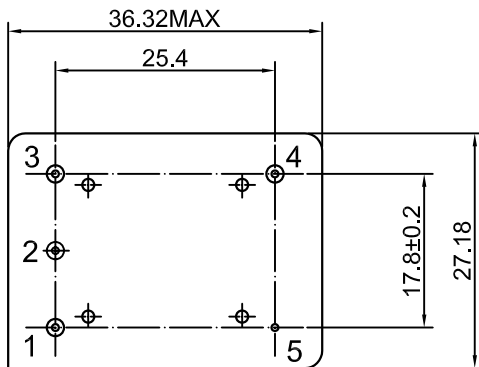


Pin Connections:

Pin	Function
1	Control Voltage or N.C.
2	Reference Voltage or Oven Monitor or N.C.
3	Supply Voltage
4	RF Output
5	Ground

Unit in mm

1mm = 0.0394 inches

Side View

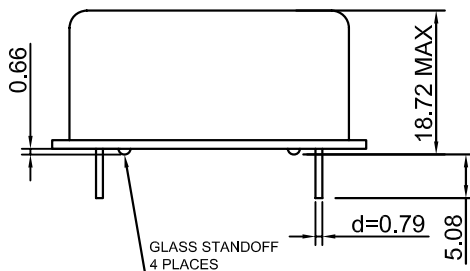



Specifications

Oscillator Specification	Sym	Condition	Value			Unit	Note	
			Min.	Typ.	Max.			
Operational Frequency	F _{nom}			10		MHz		
RF Output								
Signal Waveform			HCMOS					
Load	R _L			15pf				
H-Level Voltage	V _H		4.4			V		
L- Level Voltage	V _L				0.3	V		
Duty Cycle		@+2.5V	45	50	55	%		
Spurious					-60	dBc		
Power Supply								
Reference Voltage			2.716	2.8	2.884	V		
Reference Voltage Load			9			kohm		
Reference Voltage Temp Stability			-0.5		+0.5	mV		
Supply Voltage	V _s		4.75	5.0	5.25	V		
Power Consumption		Steady state @+25°C			2.5	W	power	
		Warm-up@ turn on			1.75	A	current	
Frequency Adjustment Range								
Electronic Frequency Control (EFC)		V _{co} @Min Voltage	-0.25		-0.15	ppm	Ref to freq. at nominal center voltage	
		V _{co} @Max Voltage	+0.15		+0.25	ppm		
EFC voltage	V _c		0		2.8	V		
Center Voltage		When not connected, V _{co} input is internally held at this voltage		1.4		V		
Linearity			-10		+10	%		
Input Impedance			50			kohm		
EFC Slope			positive					
Frequency Stability								
Versus Operating Temperature Range		-10°C to +70°C			±0.05	ppb		
Initial Tolerance @+25°C after turn on power 30±5 min		≤ 90 days following date code; VCO Input at Center Voltage ±0.001V	-0.1		+0.1	ppm		
Versus supply voltage	V _s	±5% change	-0.1		+0.1	ppb		
Warm-up		In 5 min @+25±1°C Refer to 1 hour	-20		+20	ppb		
Retrace		After 60 minutes from turn on, following 24 hours minimum on time, and 24 hours maximum off time	-5		+5	ppb	At constant temperature and voltage. Referenced to frequency at off time	
Aging Per Day		After 30days			±0.2	ppb		
Aging 1 st Year						±40	ppb	
Aging 10 st Year						±200	ppb	
Allan Variance		1s			0.005	ppb		
		10s			0.01	ppb		
SSB Phase noise		1Hz			-90	dBc		
		10Hz			-120	dBc		
		100Hz			-135	dBc		
		1kHz			-145	dBc		
		10kHz			-155	dBc		



Dynamic Engineers Inc.

2550 Gray Falls Dr., Suite#128, Houston, TX, 77077 USA
TEL: 1-281-870-8822 EMAIL: Sales@DynamicEng.com

DOCXO3627BM-10MHz-113

Double Oven Controlled Crystal Oscillator

		100kHz			-160	dBc	
Environmental, Mechanical Conditions							
Storage temperature range	-40°C to +85°C						
Shock (non-operating)	Per MIL-STD-202, Method 213, test condition J; 30G, half sine, 11ms						
Vibration (non-operating)	Per MIL-STD-202, Method 201; 0.06" total p-p, 10 to 55Hz						