



Features and Benefits

Frequency range: 10MHz
Supply voltage: 5.0V
Steady state: 1.3W Max
Output waveform: Sinewave
Frequency stability vs. operating temperature: ± 3 ppb, ± 5 ppb, ± 10 ppb
Aging: ± 50 ppb per year
Phase noise@10KHz: -152dBc/Hz
Operating temperature: -40°C to +85°C
Size:25.4x25.4x12.7mm

Typical Applications


Small Cell, Portable Telecommunication Device
Test and Instrumentation
Synthesizer, Digital switch, Reference Timing Circuit
Packet Timing Protocol ATCOM System

Description

OCXO2525BM-FD-10MHz_Sine is designed for applications where exceptional frequency stability and timing is required. It has both excellent temperature performance and short-term stability. These characteristics make excellent choice for timing applications.

Mechanical Drawing & Pin Connections


Drawing No: MD160042-2

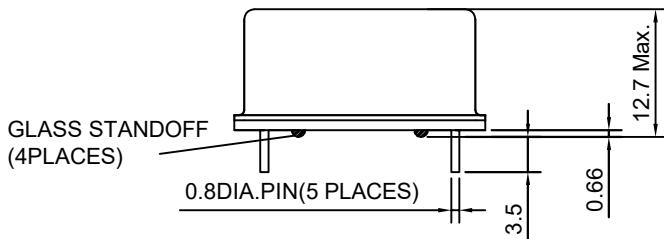

PIN Function

Pin	Function
1	R.F. OUTPUT
2	GND
3	Control Votage
4	Reference Voltage or N.C.
5	Supply Voltage

Unit in mm
1mm = 0.039 inches

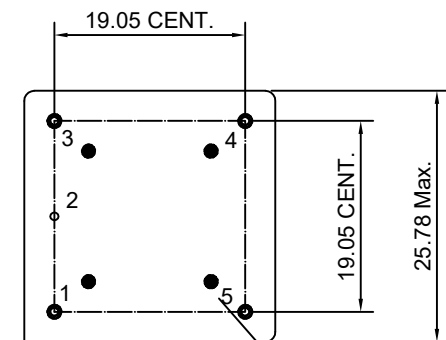

VIEW FROM BOTTOM

NUMBERS FOR REFERENCE ONLY
(NOT STAMPED ON UNIT)



Specifications

Oscillator Specification	Sym	Condition	Value			Unit	Note
			Min.	Typ.	Max.		
Operational Frequency	F _{nom}			10		MHz	
RF Output							
Waveform			Sinewave				
Level			+6	+8	+10	dBm	
Load			50			ohm	
Harmonics					-30	dBc	
Spurious					-60	dBc	
Electrical Frequency Adjustment (PIN = "VCO INPUT")							
Tuning Range		VCO @ Min. Voltage			-0.5	ppm	Referenced to frequency at nominal Center Voltage
		VCO @ Max. Voltage	+0.5			ppm	
Control Voltage		Optional, Refer to Ordering Information	0		5.0	V	
			0		4.0	V	
Slope			positive				
Center Voltage		Optional, Refer to Ordering Information		+2.5		V	
				+2.0		V	
Linearity			-10		+10	%	
Input Impedance			100			Kohm	
Reference Voltage (PIN = "REFERENCE VOLTAGE") (Optional Function. Refer to Ordering Information.)							
Voltage			3.8	4.0	4.2	V	
Load			9			kohm	
Power Supply							
Supply Voltage	V _s		4.75	5.0	5.25	V	
Steady state		+25°C			1.3	W	
Current		@ turn on			800	mA	
Frequency Stability							
Versus Operating Temperature Range		ref to +25°C	Pls see Ordering Information			ppb	
Initial Frequency Accuracy		ref to +25°C; @ +25 ±1°C; after turn on power 15 ±1 minutes; ≤90 days following date code; VCO Input voltage @ Center Voltage ±0.001V			±0.1	ppm	
Versus supply voltage		±5% change			±0.5	ppb	
Versus Load		±5% change			±0.5	ppb	
Short Term					0.05	ppb/s	Root Allan variance
Aging		Per day, at time of shipment			±0.5	ppb	
Aging Per Day		after 30 days			±0.5	ppb	
Aging 1 st Year					±50	ppb	
Aging 10 Years					±0.3	ppm	
Warm-up		In 10 minutes @25±1°C			±10	ppb	Reference to 1 hour
Phase Noise		1Hz		-95	-90	dBc/Hz	
		10Hz		-125	-120	dBc/Hz	
		100Hz		-140	-135	dBc/Hz	
		1kHz		-148	-145	dBc/Hz	
		10kHz		-152	-150	dBc/Hz	
Environmental, Mechanical Conditions							
Operating temperature range	Refer to Ordering Information						
Storage temperature range	-55°C to +105°C						
Humidity	MIL-STD-202, Method 103 Test Condition A; 95% RH @ +40°C, non-condensing,240 hours						
Vibration (non-operating)	MIL-STD-202, Method 201; 0.06" total p-p, 10-55Hz						
Shock (non-operating)	MIL-STD-202, Method 213, test condition J; 30g,11ms, half-sine						



Ordering Information

OCXO2525BM-FD-10MHz_Sine	-	01	02	03	04
Group		Code			

For example, OCXO2525BM-FD-10MHz_Sine -1-1-2-1 denotes the OCXO has the following specifications:

Stability Over Temperature: ±3ppb
 Temperature Range: -30°C to +70°C
 Control Voltage: 2.0V
 Reference Voltage: N/A (No reference voltage)

01	Frequency Stability
Code	Specification
1	±3 PPB
2	±5 PPB
3	±10 PPB

02	Temperature Range
Code	Specification
1	-30°C to +70°C
2	-40°C to +85°C

03	Control Voltage
Code	Specification
1	+2.5 V
2	+2.0 V

04	Reference Voltage
Code	Specification
1	N/A
2	4.0 V